


MODEL: OT200-12L(GEL)

NO.: 302030066-00007



Plane Chart:

Unit:(mm) Terminal type:(T3)

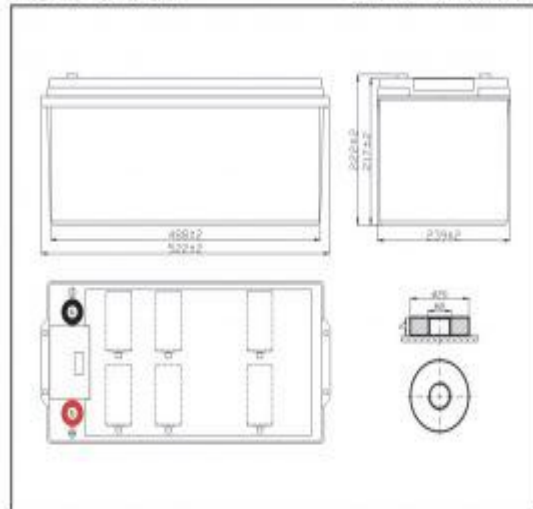

ISO 9001
ISO 14001
OHSAS18001




Parameter Chart:


Volts		12V	
Capacity(25°C)		10 hours rate (20A)	200Ah
Discharge Current Testing (25°C)		1 hours rate (110A)	110Ah
		3 hours rate (50A)	150Ah
Internal Resistance		Full Charged Battery 25°C	2.5mΩ
Capacity Affected By Temperature		40°C	104%
		25°C	100%
		0°C	83%
		-15°C	65%
Residual Capacity (25°C)		Capacity After 3 Months Storage	91%
		Capacity After 6 Months Storage	82%
		Capacity After 12 Months Storage	65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 60A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)			64.7Kg

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Residual Capacity

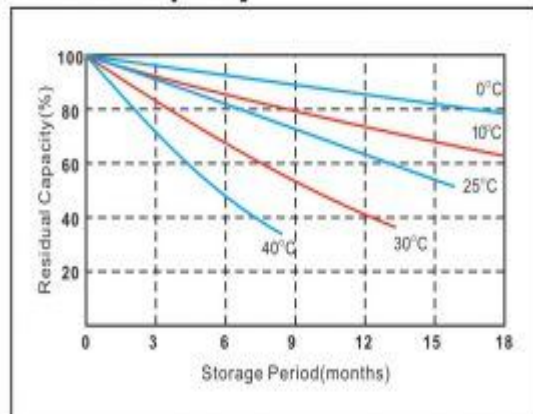

Discharge Current 25°C

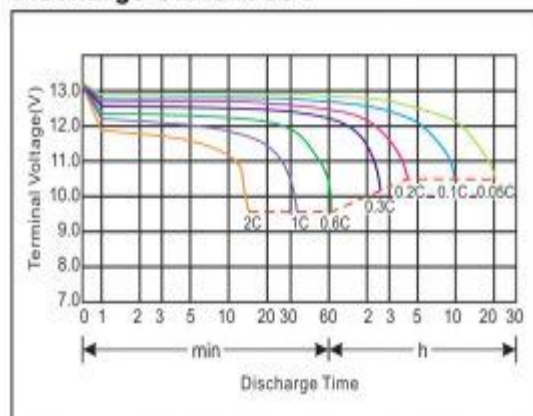




DIGITAL SCREEN INTELLIGENT GEL STORAGE BATTERY


MODEL: OT200-12A(GEL)

NO.: 302040066-00007

Constant voltage charging characteristics

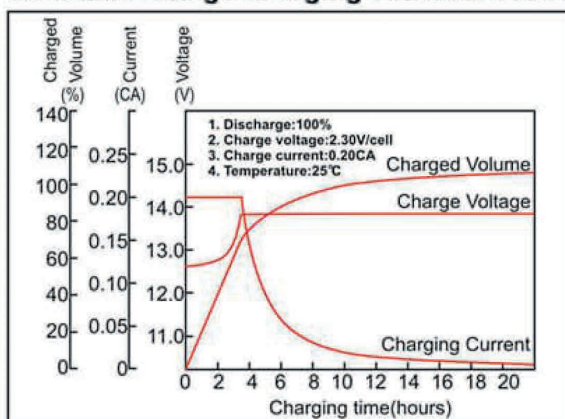

Cycle service life in relation to the depth of discharge

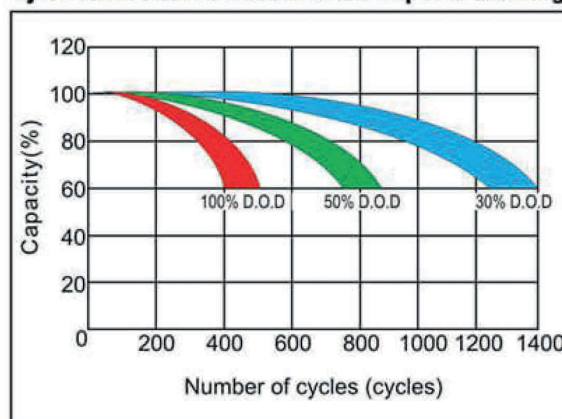

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	220.4	175.4	108.2	65.1	36.6	26.5	18.5	12.2	10.2	5.4
10.2V	209.4	168.3	104.2	62.5	36.1	26.1	18.2	12.1	10.1	5.4
10.5V	203.4	164.3	101.2	61.2	35.8	25.9	18.0	12.1	10.0	5.3
10.8V	196.4	160.3	99.00	59.4	35.4	25.6	17.8	12.0	10.0	5.3

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2380.8	1925.8	1214.4	742.5	423.8	310.6	219.4	146.3	123.2	64.3
10.2V	2261.5	1848.7	1169.3	712.4	417.8	306.6	215.4	145.3	122.2	64.3
10.5V	2196.4	1803.6	1159.3	708.4	413.8	303.6	212.4	145.3	121.2	64.1
10.8V	2121.2	1760.5	1111.2	677.4	409.8	300.6	210.4	144.3	119.2	63.7

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.



ZHANGZHOU HUAWEI POWER SUPPLY TECHNOLOGY CO.,LTD.

Add:Industrial District of Lieyu Town, Yunxiao County, Zhangzhou-363300,Fujian, China
Tel:+86-596-8991888 E-mail:huawei-battery@vip.163.com Http://www.huawei-battery.com

V20170412