

VIGOR BATTERY

VALVE REGULATED LEAD ACID BATTERY


Model No : NPG 200 -12 12 V 200 AH

DEEP CYCLE GEL BATTERY



Plane Chart:


Unit:(mm) Terminal type:(T3)

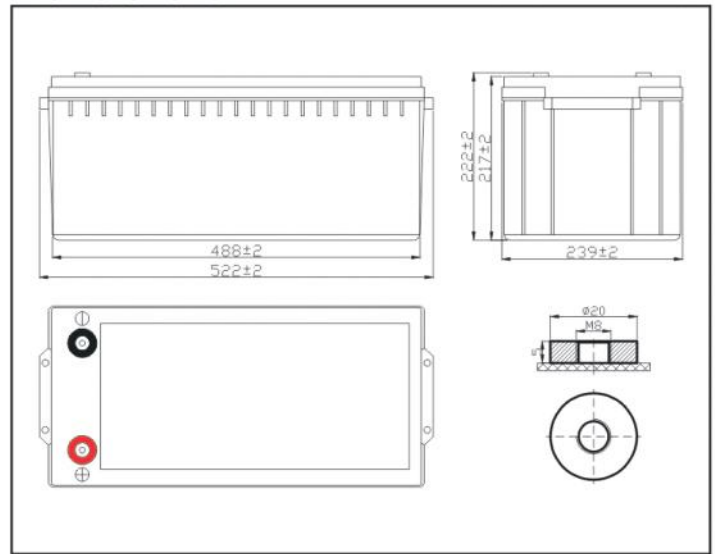


Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (20A)	200Ah	
Discharge Current Testing (25°C)	1 hours rate (110A)	110Ah	
	3 hours rate (50A)	150Ah	
Internal Resistance	Full Charged Battery 25°C	2.5mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 60A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	

Residual Capacity

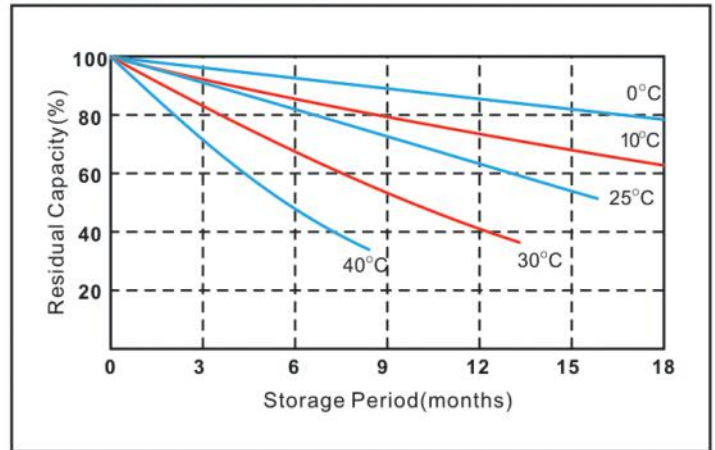

Discharge Current 25°C

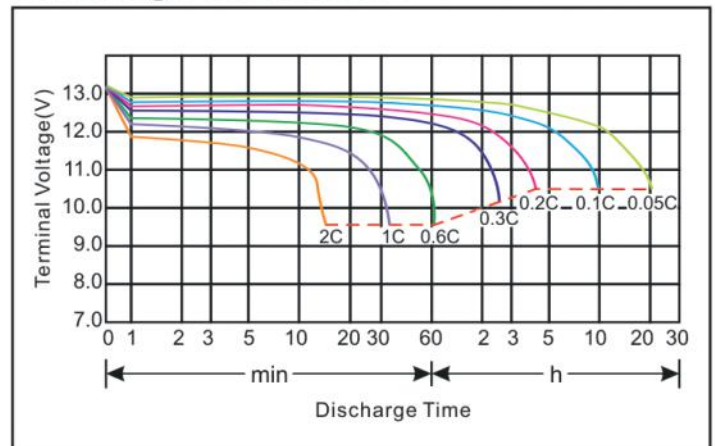


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.


Model No : NPG 200 -12 12 V 200 AH

DEEP CYCLE GEL BATTERY

Constant voltage charging characteristics

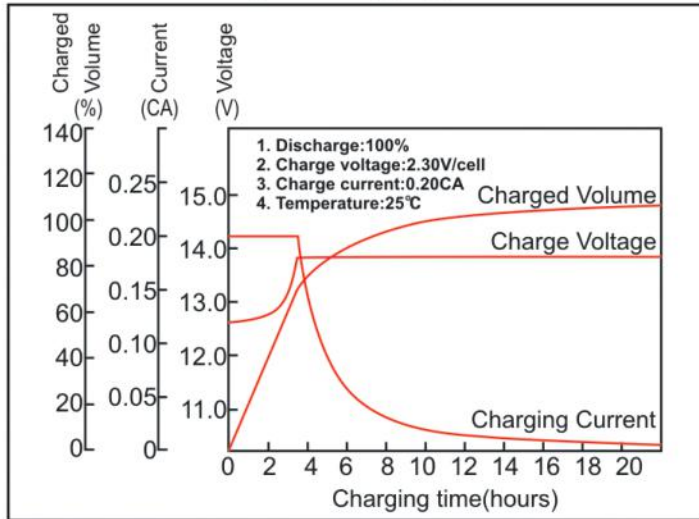

Cycle service life in relation to the depth of discharge

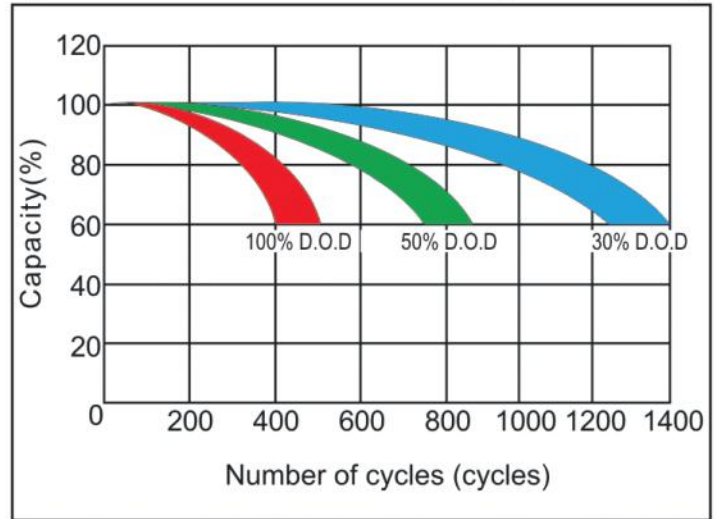

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	366.3	207.9	128.7	72.4	54.5	41.4	37.8	24.1	20.1	10.2
10.2V	351.5	200.0	123.8	71.3	53.0	40.9	36.6	23.9	20.1	10.2
10.5V	344.5	195.0	120.8	70.7	52.6	40.6	36.3	23.8	20.0	10.1
10.8V	333.6	190.1	117.8	69.8	51.9	39.4	35.9	23.5	20.0	10.1

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	4022.4	2332.4	1467.2	837.5	632.6	487.1	439.6	285.1	239.6	122.8
10.2V	3861.0	2239.4	1410.8	824.7	622.7	481.1	432.6	283.1	237.6	121.8
10.5V	3782.8	2187.9	1376.1	817.7	617.8	477.2	428.7	282.2	237.6	120.8
10.8V	3686.0	2127.5	1338.5	807.8	610.8	463.3	424.7	278.2	236.5	120.8

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.



MSDS